
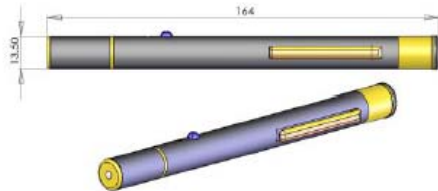




Laser Pointers and Portable Lasers (Type : SLPP-09802)

Specifications (T=25° C):

| Parameters | Symbol | Min | Typ | Max | Unit |
|-------------------------|-------------|------------------------|------|-----|------|
| Lasing Wavelength | λ_p | 975 | 980 | 985 | nm |
| Output Power | P_o | 1 | | 3 | mW |
| Transverse Mode | TM | Near TEM ₀₀ | | | |
| Beam Divergence | θ | | | 1.5 | mrad |
| Beam Size (at Aperture) | D | | 3.0 | | mm |
| Surface Color | | Black | | | |
| Power Supply | | 2XAAA/1.5V Battery | | | |
| Operating Lifetime | | | 4000 | | h |

Package:

| SLPP-09802 | Dimensions |
|---|--|
|  |  |
| Accessory | Warning |
|  |  |